




Mini Charger

SLA Battery charger
Universal input voltage
Small size, Table model




	MINI1215	MINI2410	MINI2420
Input voltage	100-240Vac 50/60Hz	100-240Vac 50/60Hz	100-240Vac 50/60Hz
Norm voltage	12V	24V	24V
V₁	14.4V	28.8V	28.8V
V₂	13.7V	27.4V	27.4V
I₁	1.5A	1.0A	2.0A
I₂	0.3A	0.3A	0.3A
Dimensions	L:110 W:53 H:37	L:110 W:53 H:37	L:119 W:58 H:38
Protected against	Short circuit Over voltage Over current	Short circuit Over voltage Over current	Short circuit Over voltage Over current
LED indicator	● on ● charge ● end	● on ● charge ● end	● on ● charge ● end

Charging Algorithm IUoU:

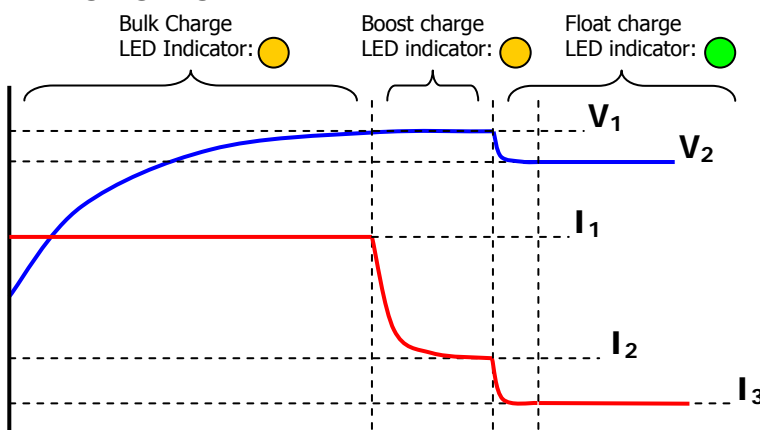

Dimensions in mm:

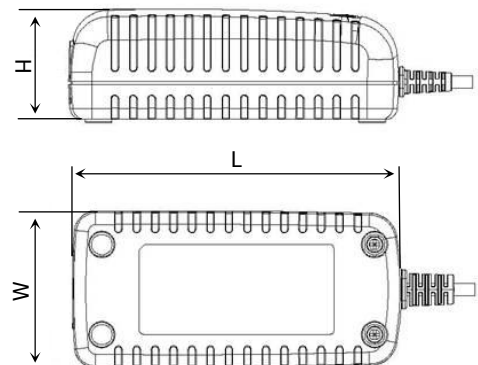




Mini Ladegerät

SLA Batterieladegerät
Weitbereichseingang
Tischgerät



	MINI1215	MINI2410	MINI2420
Netzspannung	100-240Vac 50/60Hz	100-240Vac 50/60Hz	100-240Vac 50/60Hz
Nennspannung	12V	24V	24V
V ₁	14,4V	28,8V	28,8V
V ₂	13,7V	27,4V	27,4V
I ₁	1,5A	1,0A	2,0A
I ₂	0,3A	0,3A	0,3A
Abmessungen	L:110 B:53 H:37	L:110 B:53 H:37	L:119 B:58 H:38
Schutz gegen	Kurzschluss Überspannung Überstrom	Kurzschluss Überspannung Überstrom	Kurzschluss Überspannung Überstrom
LED-Indikator	● Ein ● Ladung ● Ende	● Ein ● Ladung ● Ende	● Ein ● Ladung ● Ende

Ladekennlinie IUoU:

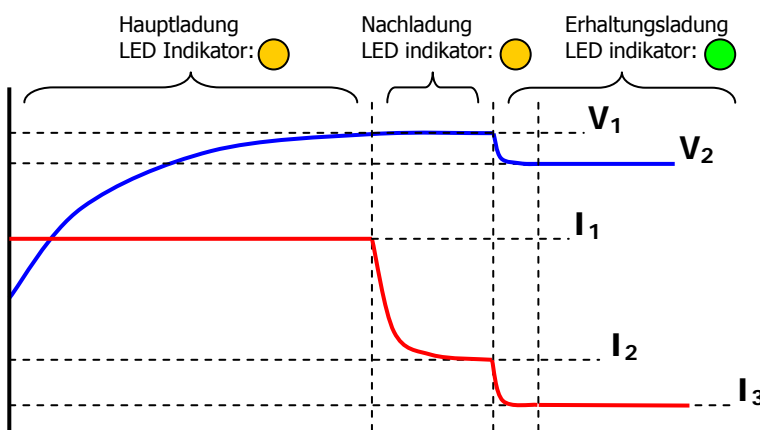

Abmessungen in mm:

