




# Mini Charger

SLA Battery charger  
 Universal input voltage  
 Small size, wallplug model




	MINI1205	MINI1210	MINI2405
<b>Input voltage</b>	100-240Vac 50/60Hz	100-240Vac 50/60Hz	100-240Vac 50/60Hz
<b>Norm voltage</b>	12V	12V	24V
<b>V<sub>1</sub></b>	14.4V	14.4V	28.8V
<b>V<sub>2</sub></b>	13.7V	13.7V	27.4V
<b>I<sub>1</sub></b>	0.5A	1.0A	0.5A
<b>I<sub>2</sub></b>	0.3A	0.3A	0.3A
<b>Protected against</b>	Short circuit Over voltage Over current	Short circuit Over voltage Over current	Short circuit Over voltage Over current
<b>LED indicator</b>	● on ● charge ● end	● on ● charge ● end	● on ● charge ● end

## Charging Algorithm:

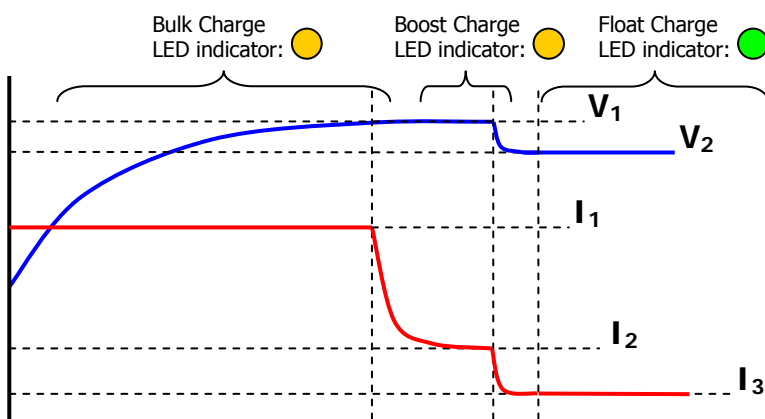

## Dimensions in mm:

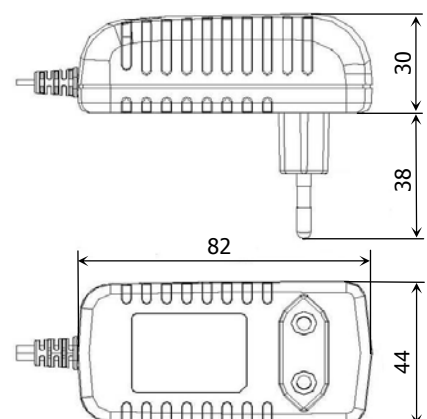




# Mini Ladegerät

SLA Batterieladegerät  
Weitbereichseingang  
Steckergerät



	MINI1205	MINI1210	MINI2405
Netzspannung	100-240Vac 50/60Hz	100-240Vac 50/60Hz	100-240Vac 50/60Hz
Nennspannung	12V	12V	24V
V <sub>1</sub>	14,4V	14,4V	28,8V
V <sub>2</sub>	13,7V	13,7V	27,4V
I <sub>1</sub>	0,5A	1,0A	0,5A
I <sub>2</sub>	0,3A	0,3A	0,3A
Schutz gegen	Kurzschluss Überspannung Überstrom	Kurzschluss Überspannung Überstrom	Kurzschluss Überspannung Überstrom
LED-Indikator	● Ein ● Ladung ● Ende	● Ein ● Ladung ● Ende	● Ein ● Ladung ● Ende

Ladekennlinie:

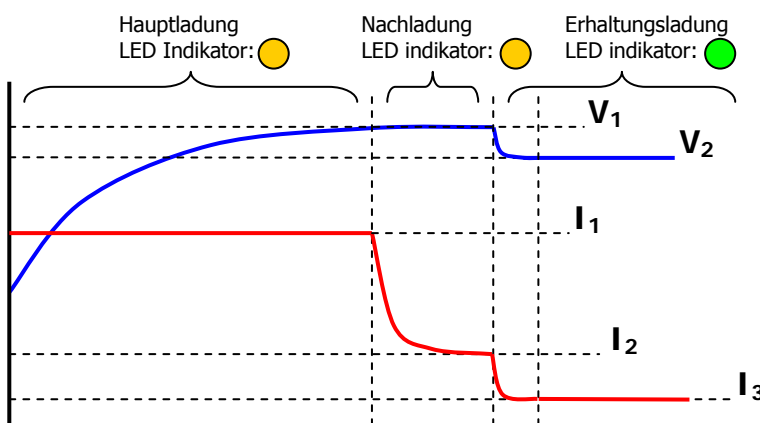

Abmessungen in mm:

